

G3-1034/36/38 PTO POWERED (BUILD YOUR OWN) ORCHARD SPRAYER




Standard Feature



Option



Standard Feature

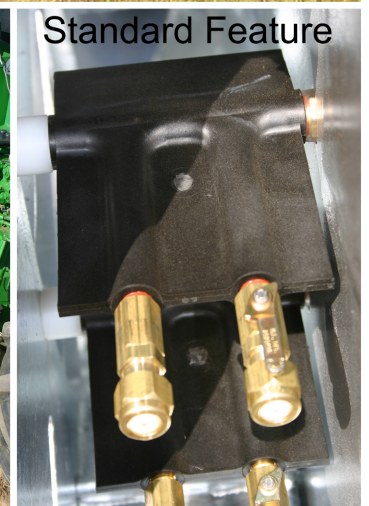

Standard Feature

Hydraulic Spray Valves

2-Point Turning Hitch

DK Turning Hitch

Adjustable Air Vanes

Davis & Davis Distributors
507 E. Dinuba Avenue • Reedley, Ca 93654
(Ph)559-638-6546 • (Fax)559-638-9262
Visit us: www.airofan.com • Contact us: info@airofan.com



G3-1034/36/38 1,000 GALLON PTO DRIVE SPRAYER

STANDARD FEATURES


- 1000 gal. 304 stainless steel tank
- DK turning hitch with a standard U-joint PTO shaft
- 44 GPM / 600 PSI Comet® diaphragm pump
- 34", 36", or 38" 8 blade steel axial flow fans (65 to 110 PTO hp by model specs)
- 2" front of tank fill coupling w/plug
- Dual hydraulic spray control valves
- Tank drive shaft w/ run down clutch
- 1" Stainless steel mechanical agitation
- 2 speed gearbox with neutral
- Composite nylon adjustable air vanes (2 nozzles per vane)
- Teejet® TXR ceramic conejet nozzles
- 550/45-22.5 Alliance tread tires (21.5L ribbed tire equivalent)

OPTIONS

- 2-Point turning w/CV PTO shaft
- Double or single lip heavy duty swivel hitch
- 11K Lumen LED spray light kit w/hazard flashing lights
- 100 GPM / 145 PSI, Myers® 2-stage centrifugal pump
- 53 GPM / 600 PSI comet® pump (IDS 2200)
- 2" & 3" stainless steel fill connections
- Electric spray control valves (stainless steel)
- Rear leaf guard
- Bravo tree targeting technologies
- In-Field data management rate controlling technologies

SPECIFICATION

LENGTH.....16', 7"
WIDTH.....103" (OUTSIDE OF TIRES)
HEIGHT.....71"-79" ADJUSTABLE
WEIGHT.....5,200 LBS.
AIR VELOCITY.....130 MPH (APPROX.)

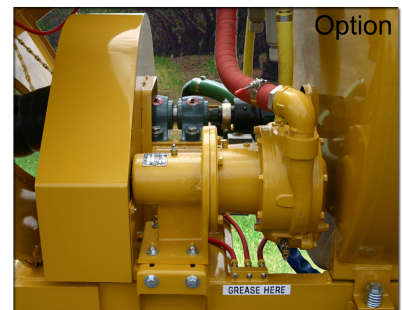

Option
Myers 2-Stage Centrifugal Pump



Option
Fan Housing Leaf Guard



Option
LED Spaylight kit (3 lights)



Option
Swivel Hitch

Visit our website: www.airofan.com