

GB-2/32 500 PTO POWERED ORCHARD SPRAYER



Leaf Guard
Option


550R / 22.5 Alliance Tread
Tire Option



Standard Feature



Option

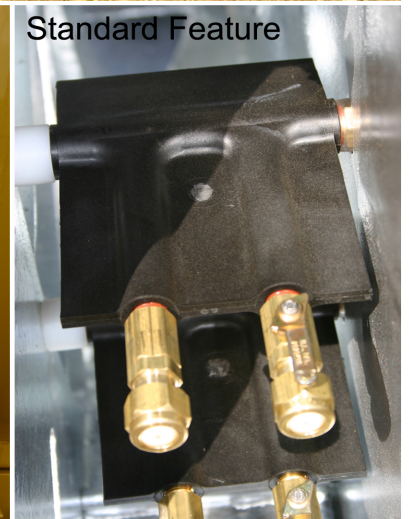

Standard Feature

DK Turning Hitch

Myers 2-Stage Centrifugal Pump

Adjustable Air Vanes

Davis & Davis Distributors
507 E. Dinuba Avenue • Reedley, Ca 93654
(Ph)559-638-6546 • (Fax)559-638-9262
Visit us: www.airofan.com • Contact us: info@airofan.com



GB-2/32 500

PTO DRIVE SPRAYER

STANDARD FEATURES

- 500 Gallon 304 stainless steel tank
- 44 GPM / 600 PSI comet® diaphragm pump
- Twin 32" diameter, 6-blade axial flow steel fans
- 2 speed gearbox with neutral
- Heavy duty PTO shaft
- Air-O-Fan 90° DK turning hitch
- HD size 6 tank driveline
- 1" 304 stainless steel mechanical agitation
- Dual or single hydraulic spray control valves
- 304 stainless steel strainers
- Teejet® TXR Conejet ceramic nozzles
- 13.5Lx16.1 8 ply ANS turf tires
- Galvanized fan housing
- Heavy duty hubs and spindles
- Composite nylon adjustable air vanes w/ specialty valves

Dual Hydraulic Spray Valves



2" Front Quick Fill Option

OPTIONS

- 600 Gallon tank configuration
- Indented tank
- 100 GPM / 145 PSI Myers® 2 stage centrifugal pump
- 53 GPM / 600 PSI Comet® Pump (Model IDS 2200)
- Dual electric spray control valves
- 2" and 3" Stainless steel fill connections
- Rear leaf guard
- 550 / 45 - 22.5 Alliance tread tires

SPECIFICATIONS

Height.....59" to 69"
Weight.....500 Gal. = 3,500 lbs.
Length..... 17' 6"
Width.....80"
Air velocity.....130 mph (approx.)



Spraying

Visit our website: www.airofan.com