


SE-32 400NW PTO POWERED ORCHARD SPRAYER



Standard Feature



Option

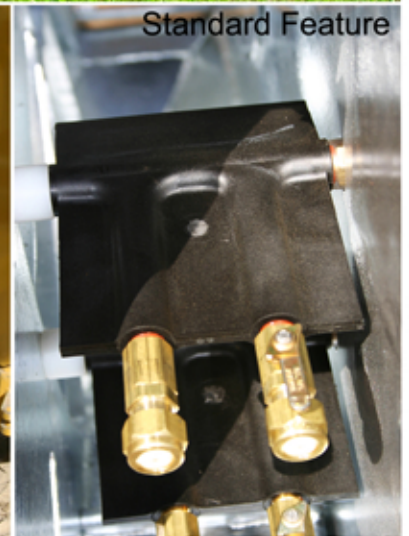

Standard Feature

Rear Deflection Cover

DK Turning Hitch

Adjustable Air Vanes

Davis & Davis Distributors
507 E. Dinuba Avenue • Reedley, Ca 93654
(Ph)559-638-6546 • (Fax)559-638-9262
Visit us: www.airofan.com • Contact us: info@airofan.com



SE-32 400 NORTH WEST

PTO DRIVE SPRAYER

STANDARD FEATURES

- 400 Gallon 304 stainless steel tank
- 26 GPM / 600 PSI Comet® diaphragm pump
- 32" diameter, 9-blade axial flow steel fan
- 2 speed gearbox with neutral
- Heavy duty constant velocity PTO shaft
- Tank drive shaft w/ rundown clutch
- 1" 304 stainless steel mechanical agitation
- Cable type remote control
- 304 stainless steel strainers (fill, suction, delivery)
- 9.50L x 15" 8 ply ribbed implement tires
- Heavy duty hubs and spindles w/3 position axle
- Galvanized fan housing w/limb deflection guard
- Composite nylon adjustable air vanes
- Teejet® Ceramic nozzles



OPTIONS

- DK turning hitch & 2-Point turning hitch
- Double & single lip swivel hitches
- 36 GPM / 600 PSI Comet® diaphragm pump
- Hydraulic and electric control valves
- 2" and 3" Stainless steel fill connections
- Rear leaf guard



SPECIFICATIONS

Length.....13'6"

Width.....60"

Height.....50" (Top of tank)

Weight.....1,880 lbs.

Air Velocity...120 MPH

PTO Horse Power Requirements...45-70



Visit us: www.airofan.com