

SE-32 400 PTO POWERED ORCHARD SPRAYER



Leaf Guard
Option


Front Cover
Option



Option



Option

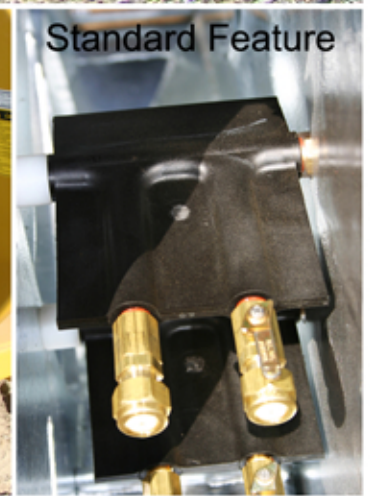

Standard Feature

Hydraulic Controls

DK turning hitch

Adjustable Air Vanes

Davis & Davis Distributors
507 E. Dinuba Avenue • Reedley, Ca 93654
(Ph)559-638-6546 • (Fax)559-638-9262
Visit us: www.airofan.com • Contact us: info@airofan.com



SE-32 400

PTO DRIVE SPRAYER

STANDARD FEATURES

- 400 Gallon 304 stainless steel tank
- 26 GPM / 600 PSI Comet® diaphragm pump
- 32" diameter, 7-blade axial flow steel fan
- 2 speed gearbox with neutral
- Heavy duty constant velocity PTO shaft
- Tank drive shaft w/ rundown clutch
- 1" 304 stainless steel mechanical agitation
- Cable type remote control
- 304 stainless steel strainers (fill, suction, delivery)
- 10.00 x 15" 10 ply ribbed implement tires
- Heavy duty hubs and spindles
- Galvanized fan housing
- Composite nylon adjustable air vanes
- Teejet® stainless steel nozzles

OPTIONS

- DK turning hitch & 2-Point turning hitch
- Double & single lip swivel hitches
- Hydraulic and electric control valves
- 2" and 3" Stainless steel fill connections
- Rear leaf guard

SPECIFICATIONS

Length.....13'4"

Width.....60"

Height.....52" (Top of tank)

Weight.....2,000 lbs.

Air Velocity...120 MPH

PTO Horse Power Requirements...45-70

Visit us: www.airofan.com

