

SJ-300V PTO POWERED VINEYARD SPRAYER




Spray Extension Door
Option



Option



Option

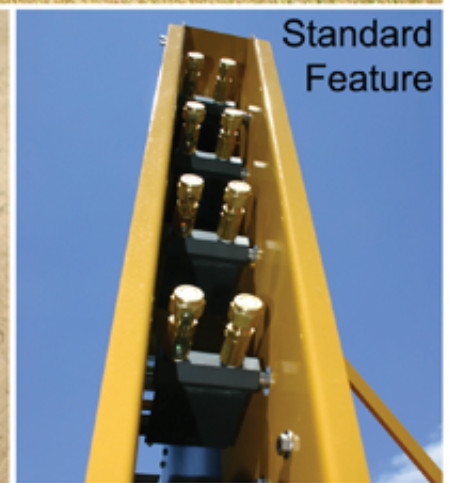

Standard
Feature

Leaf Guard

Electric Spray Control Valves

Adjustable Air Vanes

Davis & Davis Distributors
507 E. Dinuba Avenue • Reedley, Ca 93654
(Ph)559-638-6546 • (Fax)559-638-9262
Visit us: www.airofan.com • Contact us: info@airofan.com



SJ-300V "SLIM JIM" V-TOWER

PTO DRIVE SPRAYER

STANDARD FEATURES

- 300 Gallon 304 stainless steel tank
- 26 GPM / 600 PSI Comet® diaphragm pump
- 30" diameter, 6-blade axial flow steel fan
- 2 speed gearbox with neutral
- Heavy duty constant velocity PTO shaft
- Tank drive shaft w/ rundown clutch
- 1" 304 stainless steel mechanical agitation
- Cable type remote control
- 304 stainless steel strainers (fill, suction, delivery)
- Teejet® stainless steel nozzles
- 7.60x15" ribbed implement tires
- Heavy duty hubs and spindles
- Galvanized fan housing
- Vineyard volute tower
- Hard anodized aluminum air vanes w/specialty valves

OPTIONS

- TeeJet® ceramic nozzles
- Hydraulic and electric control valves
- 2" and 3" Stainless steel fill connections
- Rear leaf guard
- Tire and wheel exchange to 11Lx16.1" 8 ply ribbed tires

SPECIFICATIONS

Length.....13'4"

Width.....52"

Height.....50"(top of tank) 75"(Tower Top)

Weight.....1,340 lbs.

Air Velocity...120 MPH

PTO Horse Power Requirements...30-60



Visit our website: www.airofan.com